

# KP(T)-35-COMBO Series


# Wired & Wireless Combo Keypad



KP(T)-35-COMBO Series is a Wired and Wireless Keypad with built-in RF module, designed to connect with Climax Hybrid Panel and realize local programming as well as easy-to-use, on-premises security system control for Hybrid Security System. KP(T)-35-COMBO can also provide wireless convenience and have the same features with its wireless equivalent, KP-35 Series.

KP(T)-35-COMBO Series provides easy operation and programming and supports both installer and user menus for configuration. The LCD display with backlight illumination displays alarm memory, event logs, fault reports, or system status allowing users to gain an overview at a glance. The dual key function can activate panic, fire, medical, or emergency alarm at one press, providing users with an additional peace of mind and safety.

The KPT-35-Combo and KPT-35N-Combo models includes a proximity reader to enable arming and disarming with proximity RFID key fob or Near Field Communication (NFC) tag, without having to enter a pin code manually.

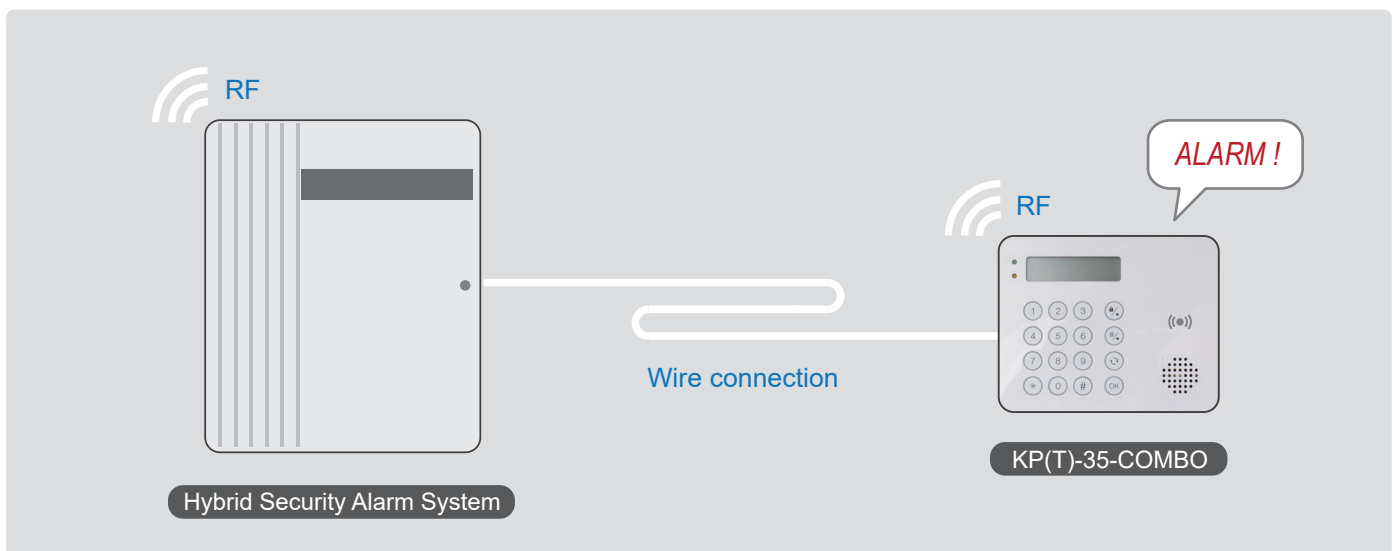

## KP(T)-35-COMBO Series Wired & Wireless Combo Keypad

### Features

- Wired & wireless combo keypad
- Compatible with Climax Hybrid Security system
- Installer and user menus for configuration
- 32-character LCD displays Alarm memory, event logs, fault reports or system status
- Built-in siren to emit alarm sound
- Audible beeps to indicate entry/exit delays and other system status
- Keypad and LCD display illuminated for easy night time visibility
- Dual key function to trigger panic, fire or medical alarms
- Wall mount tamper
- Regular supervision signals to check system integrity
- Easy installation with the options of both wall-mounted or desktop deployment
- Sleek, modern design
- EN50131 Grade 2 (wireless) or Grade 3 (wired), Class II certified

### Specifications

#### KP-35-Combo

Power Source	From BUS connection to the control panel: BUS 13.5V
Numbers of wired keypads in the system	32
Current Consumption (Standby)	11.3 mA
Current Consumption (Maximal)	43.6 mA
Backup Battery	L91 AA Lithium 1.5V x 2*
Backup Battery life	3 years**
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	143 mm x 115 mm x 28.5 mm

\* Note: The package does not include the battery.

\*\* Note: Actual battery life may vary with product settings, operating environment, and usage patterns.

#### KPT-35-Combo / KPT-35N-Combo

Power Source	From BUS connection to the control panel: BUS 13.5V
Numbers of wired keypads in the system	32
Current Consumption (Standby)	12.3 mA
Current Consumption (Maximal)	57.6 mA
RF Frequency	F1 868 MHz / F1 433 MHz
Backup Battery	L91 AA Lithium 1.5V x 2*
Backup Battery life	3 years**
NFC Tag Dimensions	45mm x 25mm
NFC Tag Protocol	ISO 14443A
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	143 mm x 115 mm x 28.5 mm

\* Note: The package does not include the battery.

\*\* Note: Actual battery life may vary with product settings, operating environment, and usage patterns.

## KP(T)-35-COMBO Series Wired & Wireless Combo Keypad

### Ordering Information

---

<b>KP-35-Combo</b>	Wired and Wireless Combo Keypad
<b>KPT-35-Combo</b>	Wired and Wireless Combo Keypad with RFID Key Fob
<b>KPT-35N-Combo</b>	Wired and Wireless Combo Keypad with NFC Tags